



Recommended Cleaning Guide

IMPORTANT

Read these instructions thoroughly before cleaning.

To ensure the Power Links Matting System remains in top condition, it is important to properly clean the Power Links mat using these instructions.

Recommended Cleaning Tool List:

1. Flat head screwdriver
2. Rubber mallet
3. Wet/dry vacuum (Shop Vac) with wide and narrow head attachments
4. Broom
5. Mop



Flat head screwdriver



Rubber mallet




Wet/dry vacuum



Broom



Mop

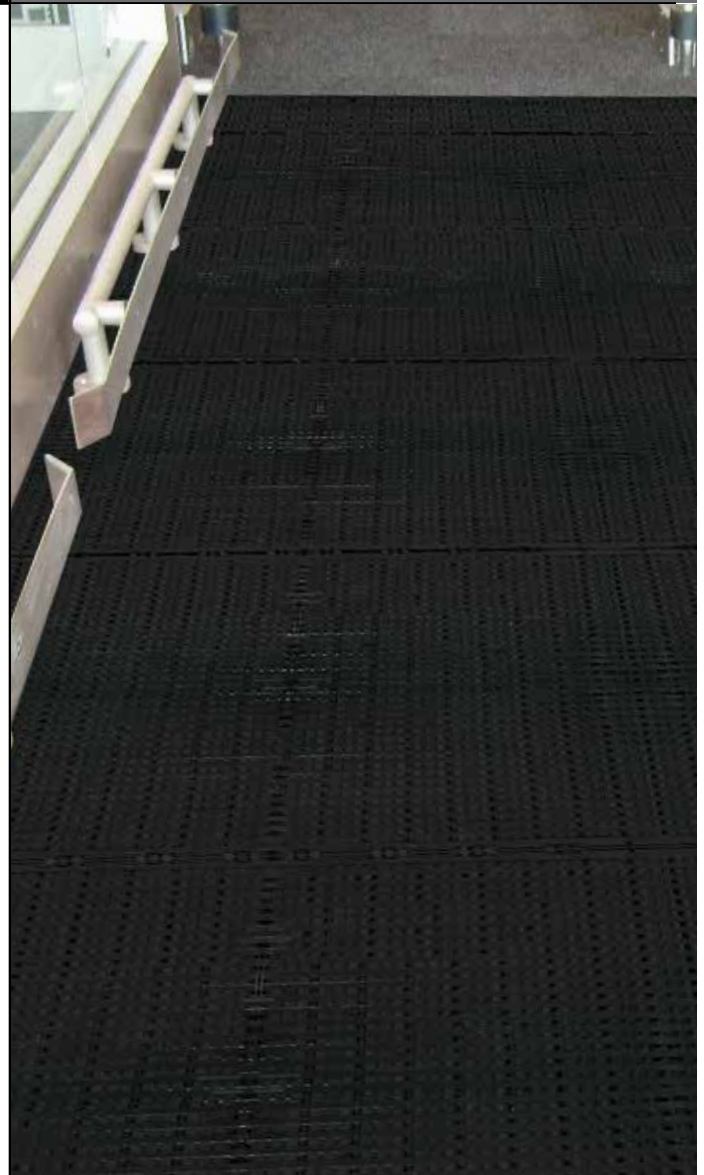

Power Links System Weekly Cleaning

1

Vacuum or sweep right over the top of the Power Links floor grid.



2

Wet/dry vacuum - Removes the debris contained below the top scraping surface.



3

Damp Mop - A low PH standard cleaning solution will remove any residue from the surface of the parallel ribs, leaving an attractive finish.

If these weekly steps are followed the Power links will only need to be rolled up for deep cleaning once or twice annually.



Power Links System Semi-Annual Cleaning or as Needed

1

Starting on the right side of the system, pull with two hands to dislodge the Power Links from the mat retainers. Use the flat head screwdriver if needed.



2


With both hands, pull and **roll** the matting back. (Do **NOT** fold.)



3

Roll half of the Power Links mat over onto the other half from right to left.

It is important to leave the other side of the mat secured to the retainers.

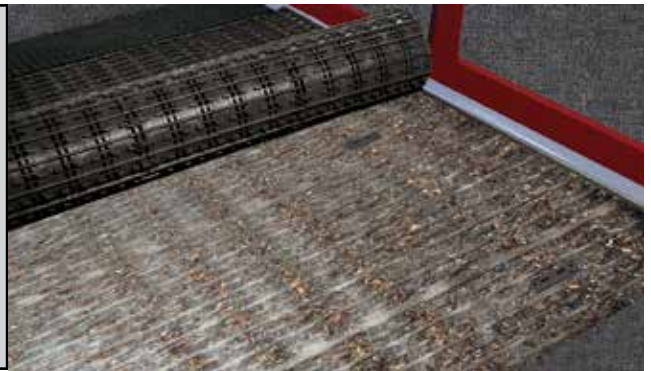


4

A rubber mallet may be used to tap the back of the Power Links to dislodge the debris and dirt from the holes in the mat.



5


Vacuum or sweep the debris on the floor under the mat.

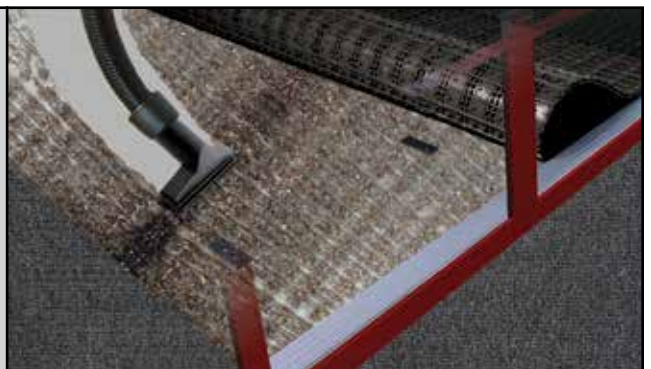

Power Links System Semi-Annual Cleaning or as Needed

6

Carefully vacuum or sweep the area around the mat retainers, clearing all loose debris.

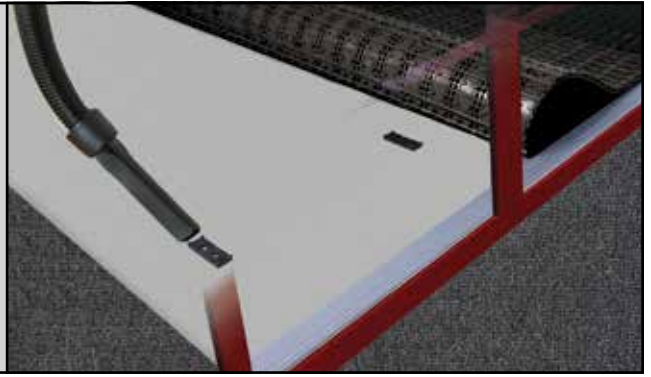

7

Roll the first half back in place.



8

Using a rubber mallet, tap the area over the mat retainers to properly engage the mat to the retainers. This will allow the mat to be flat on the floor.



9

Replace the edge of the Power Links.

Repeat steps 1-9 on the left side of the Power Links system.



10

Finish by vacuuming or sweeping the top surface over the entire Power Links system to remove any surface dirt and debris.

